



## ST504

### EEL GUTTING MACHINE

#### MODEL



#### TECHNICAL DATA




FEATURE	DATA
Operators	1
Voltage range (1)	220- 480V 50-60Hz
Power (1)	3,1kW/3Ph
Controls	24V
LxWxH (2)	3550 x 1000 x 1265 mm
Weight (3)	402 kg
Working width (2)	950 mm
Water usage (4)	2,7- 3l/min
Water connection	Ø8
Air usage	-
Air connection	-
Speed (5)	+/- 23 pcs per minute

- (1) depending on requested voltage
- (2) 1mm = 0,03937 inches
- (3) 1kg = 2,20462 pounds
- (4) 2 bar

Gutting machine for farmed eels from 100 to 250 grams on the same setting. Please check our website and product matrix on the main folder for more information. When ordering, please provide STEEN with the electrical specifications and water connection available. Also inform us which eel species (preferably the scientific name) you would like to process with what capacity. Please indicate if you have any special requirements regarding the product.

Evisceradora para anguilas cultivadas, con un peso de 100 a 250 gramos, en la misma configuración. Consulte nuestra web y nuestra gama de productos en la carpeta principal para obtener más información. Al realizar el pedido, proporcione a STEEN las especificaciones eléctricas y la conexión de agua disponibles. También infórmenos de la especie de anguila (preferiblemente, el nombre científico) que le gustaría procesar con qué capacidad. Asimismo, indique si tiene algún requisito especial con respecto al producto.

Máquina de evisceração para enguias de viveiro entre 100 e 250 gramas no mesmo ambiente. Consulte o nosso website e matriz de produtos na pasta principal para mais informação. Ao encomendar, indique à STEEN as especificações elétricas e ligação de água disponível. Informe também que espécies de enguias (de preferência o nome científico) desejará processar e a respetiva capacidade. Convidamo-lo a indicar-nos quaisquer requisitos especiais que possa ter sobre o seu produto.

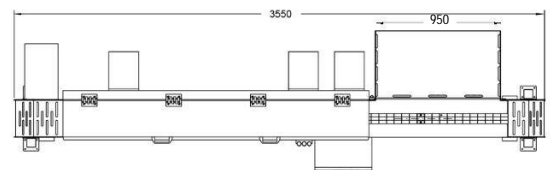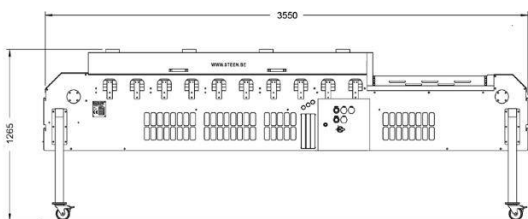

Due to the high degree of customization possibilities, technical data of the final product may vary.




# OPTIONS



## ST504

EEL GUTTING MACHINE

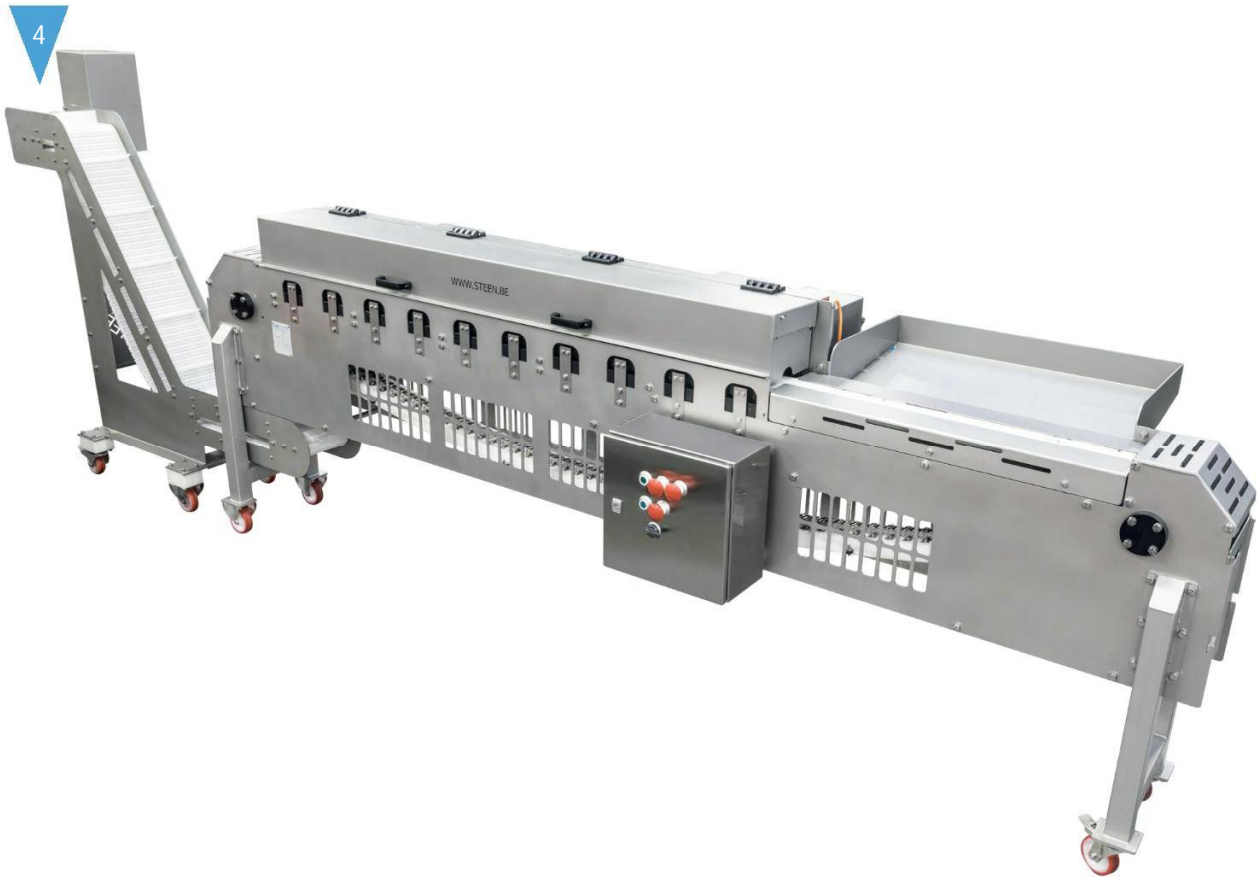

504/O24AVI

1



Vacuum inside placement

504/O24AVP

2



Extra pump

504/O24AWP

3



Collection reservoir;  
pneumatically operated

504/BELT


4



Outfeed belt

CUSTOMIZED

5



Tailor-made solution

Due to the high degree of customization possibilities, technical data of the final product may vary.