



ST111K

TABLETOP SKINNING MACHINE



TECHNICAL DATA




| FEATURE | DATA |
|-------------------|---------------------|
| Operators | 1 |
| Voltage range (1) | 220- 480V 50-60Hz |
| Power (1) | 0,55kW/3 phase |
| Controls | 24V |
| LxWxH (2) | 707 x 313 x 264 mm |
| Weight (3) | 47 kg |
| Working width (2) | 298 mm |
| Water usage (4) | - |
| Water connection | 1/2" |
| Air usage | - |
| Air connection | - |
| Speed (5) | +/- 22 m per minute |

- (1) depending on requested voltage (5) $\frac{2200\text{cm}}{\text{min}}$
 (2) 1mm = 0,03937 inches length part (cm) + 5cm = theoretical capacity
 (3) 1kg = 2,20462 pounds
 (4) spray system is optional if required

Versatile tabletop skinning machine suitable for bone-in (whole) chicken, duck, pheasant and turkey parts. Parts smaller than a whole leg (except turkey) are not allowed to be skinned on this type of machine. Please check our website and product matrix on the main folder for more information. When ordering, please provide STEEN with the electrical specifications. Also inform us which poultry parts you would like to process including required capacity in pieces per minute. Please also inform if your product is water or air chilled and the time span between killing and skinning. Optimal results occur between 2 and 4°C. In case of special requirements regarding the product, don't hesitate to ask our advice.

Máquina de desollar de sobremesa, versátil, adecuada para el pelado de piezas de pollo, pato y faisán con hueso (enteras). Las piezas más pequeñas que una pata entera (excepto pavo) no se pueden desollar con este modelo de máquina. Consulte nuestra web y nuestra gama de productos en la carpeta principal para obtener más información. Al realizar el pedido, proporcione a STEEN las especificaciones eléctricas. También infórmenos de qué partes de aves de corral desea procesar, incluida la capacidad requerida en piezas por minuto. Rogamos nos informe si su producto se refrigera con agua o aire frío, así como del intervalo de tiempo entre el sacrificio y el pelado. Los resultados óptimos se producen entre 2 y 4 °C. En caso de requisitos especiales relacionados con el producto, no dude en consultarnos.

Versátil máquina de bancada para tirar pele de frango (inteiro, com osso), pato, faisão e partes de peru. Cortes de tamanho pequenos como coxa e sobrecoxa (exceto peru) não são possível retirar nessa máquina. Consulte o nosso website e matriz de produtos na pasta principal para mais informação. Ao encomendar, avise a STEEN acerca das suas especificações elétricas. Informe também acerca quais as peças das aves que deseja processar, incluindo a capacidade em peças por minuto. Informe-nos também se o seu produto é refrigerado a água ou ar e o intervalo de tempo entre o abate e a retirada da pele. Os melhores resultados ocorrem entre 2 e 4°C. No caso de requisitos especiais sobre o produto, não hesite em consultar-nos.

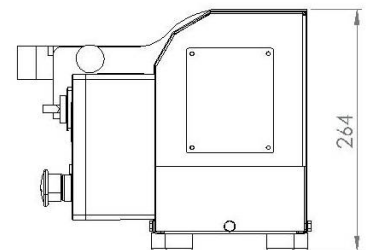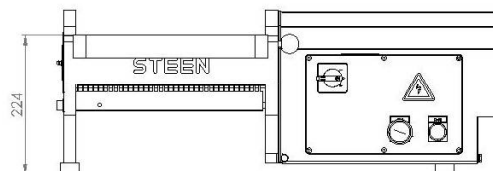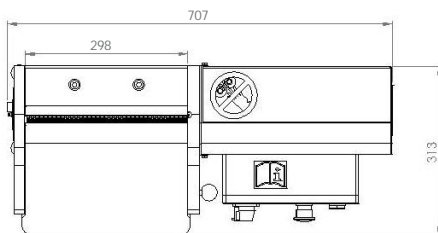

Due to the high degree of customization possibilities, technical data of the final product may vary.



OPTIONS



ST11K

TABLETOP SKINNING MACHINE



| | | | |
|---|---|--|---|
| 111/SC045A 1 | 111/SC060A 2 | 111/SC602 3 | 111/SC603 111/SC611 4 5 |
|  |  |  |  |
| Guarded shielding | Poultry comb | Table for machine at optimal height | |
| 111/SC018A8 6 | 111/SC042A 7 | 111/SC600MF 8 | CUSTOMIZED 9 |
|  |  |  |  |
| Outfeed tray | Spray system | Converter 220V single phase | Tailor-made solution |

Due to the high degree of customization possibilities, technical data of the final product may vary.