




PRO 1400 "Where Versatility Meets Performance Excellence"

Standart Machine Includes:

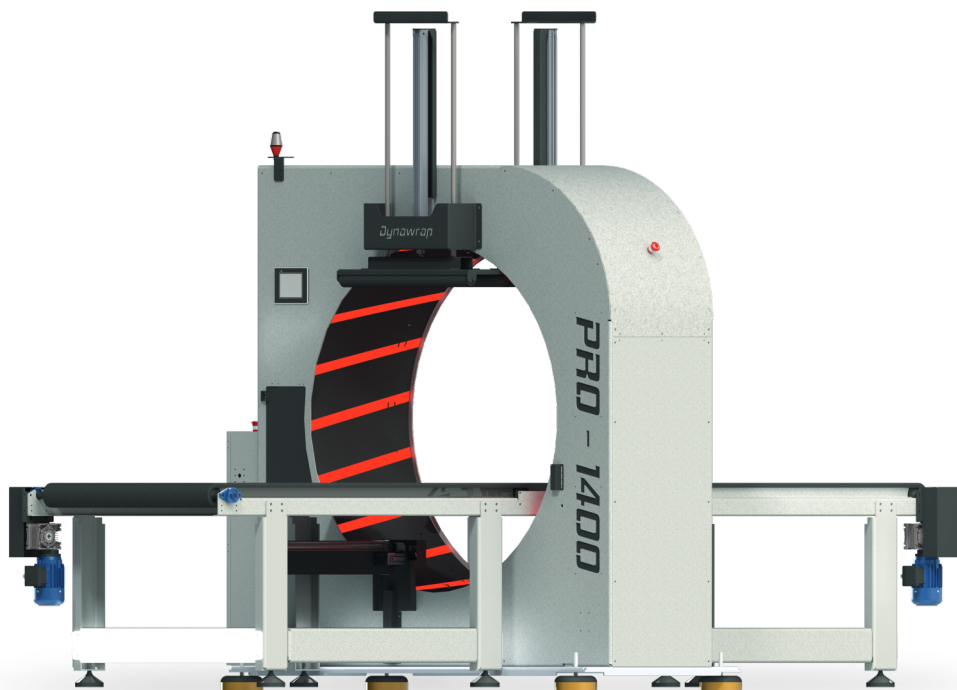

- 7" Touch Panel
- Stretch Tensioner+CTS
- Automatic Top Presses
- Automatic Cutting System
- Motorised Belt Conveyors

MACHINE TECHNICAL SPECIFICATIONS

Net Passing Diameter (mm)	1370
Standart Dimensions (W x H x L) (mm)	2100x2600x4000
Max. Rotational Velocity (rpm)	75
Total Weight (kg)	1020
Installed Total Power (kw)	2,25
Power Supply Voltage (V)	400V 3Ph+N 50/60Hz

PRODUCT SIZE TO PACK

Max. Length (mm)	No Limit
Min Length (mm) with Bridge	600
Max Passing Dimensions (mm)	Max W: 1290 H: 100 W: 800 Max H: 770

CONVEYOR BELT FEATURES

Conveyor Belt Length (mm)	1800
Conveyor Belt Width (mm)	900 (Std.) /1000 (Opt.)
Max. Conveyor Speed (m/sec)	12
Max. Load Capacity (kg/m)	90
Working Height (mm)	750-850

STRETCH FILM FEATURES

Max. Exterior Diameter (mm)	210
Reeel Core Diameter (mm)	76
Max. Exterior Width (mm)	250
Recommended Thickness (micron)	12, 15, 17, 23, 30, 35
Max. Weight	5,6kg

*125/170mm reels can also be used

CUSTOMISE YOUR MACHINE WITH:

- Wifi/Mobile Access
- Barcode Program & Printer
- Conveyor Options
- Touch Series
- Stretch Roture Warning System
- Fence Protection