

**Fully automatic
strapping machine,
fast and reliable**



**Full Automatic strapping
Machine**

1904

1904

Full Automatic strapping Machine





High performance automatic strapping machine. Very fast. Maximum reliability even working with 6 mm. strap.

- Own manufacture and technology using first quality components.
- Aluminium head set and tension roller treated ensures long life to the machine.
- Tension electronically adjustable through a magnetic clutch to get the strongest tension without any physical effort.
- Electronic control of the tension, heating, cutting and length of the strap.
- Electric adjustment of the cooling after sealing to get better sealing quality, especially for hard packages (wood, iron, etc).
- Light and easy to move because its two fixed and two revolving castors.
- Easily adaptable to packaging lines

OPTIONS:

- Available in a lot of different dimensions of arch (from 650 mm. to 2500 mm. in width and high).
- Single phase version 220 v.
- Pneumatic press or subjection packages system.

Detail of the aluminium head set.
Tension system treated to extend the life of the machine.

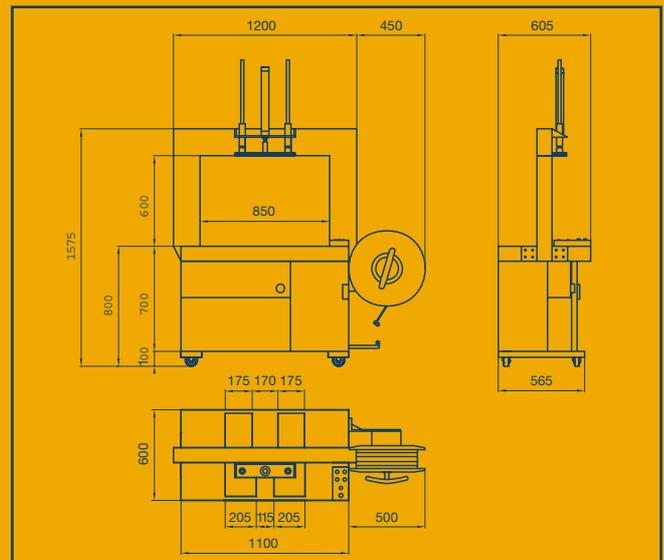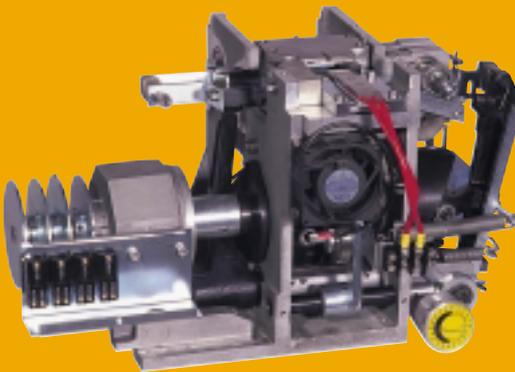

CHARACTERISTICS

VOLTAGE: 220 V / 380 V - 50 / 60 Hz. III phases.

ELECT. CONSUMPTION: 1 Kw.

APROX. PRODUCT.: 20 straps / minute.

PACKAGING DIMENSIONS: 1 package (250 Kg.).

121 X 72 X 171 cm. (Standard arch 850 X 600 mm.).

TECHNICAL SPECIFICATIONS

STRAP WITH: 8-9-12-15,5 mm. (Must be adjusted in the factory).

STRAP THICKNESS: 0,63-0,85 mm.

HEATING SYSTEM: Electrical heating.

Heating temperature and cooling time adjustable.

Full Automatic strapping Machine

The 1904 it's easily adaptable to packaging lines.



01/04 Edition -We reserve the right to made any modification without prevention.

Reisopack s.l.

Polígono Industrial "Z"
C/ De la Prensa, 3
08150 Parets del Vallès (Spain)

Tel. 902 153 448 - Fax 935 624 186
<http://www.reisopack.com>
E-mail: reiso@reisopack.com

1904

(+34) 902 153 448