

**Portable solution
for the vertical
strapping of pallets**



2700

Strapping machine Vertical semiautomatic for pallets

Semiautomatic and portable strapping machine for the vertical strapping of pallets

- Aluminium head set and tension roller treated to ensure long life of the machine.
- Tension adjustable through a clamp to get the strongest tension.
- Electronic control of the launching, tension, heating and cutting of the strap.
- Launching of the strap according to the quantity previously determined or manual launching until obtaining the length desired.
- Use of polypropylene or polyester straps.
- Equipped with electric adjustment of the cooling after sealing to get a better sealing quality.
- Unfolded lance to put the strap under the pallet.
- Norms of security: CE.
- System of electrical feed: to the network.




· Ideal for the vertical strapping of blocks, bricks and pallets of carton boxes of all kind of products.
Especially useful for the strapping of big boxes on a pallet such as bicycles, motorcycles...



The machine is equipped with an unfolded lance in order to put the strap under the pallet.



The machine can be moved manually until the pallet, avoiding to move the pallet before the strapping operation.

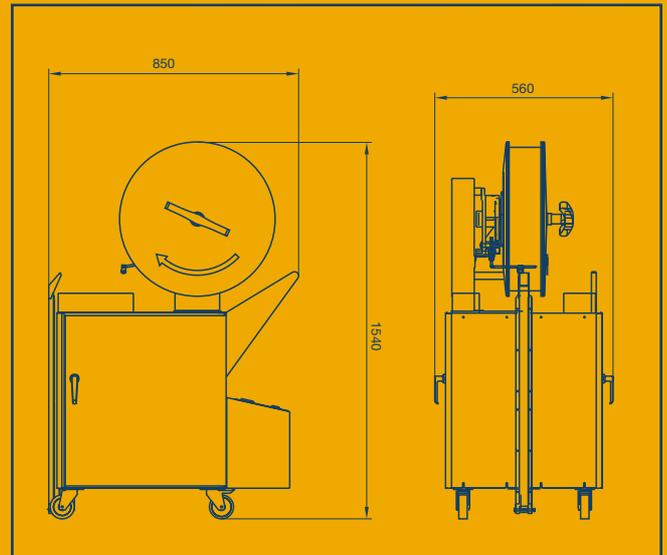

GENERAL CHARACTERISTICS

VOLTAGE: 100 V / 220 V / 230 V - 50 / 60 Hz. Single-Phase.

CONSUMPTION: 0'7 Kwa. APPROX PRODUCTION: 50-60 pallets / hour.

PACKAGING DIMENSIONS: 1 package (200 Kg.).

1210 X 610 X 1520 cm.

TECHNICAL SPECIFICATIONS

STRAP WIDTH: 9-10-12-12'7-15'5-16 mm.

STRAP THICKNESS: 0,50-1 mm.

HEATING SYSTEM: Electrical resistance.

Temperature of heating and time of cooling adjustable.

11/14 Edition - We reserve the right to made any modification without prevention.

Reisopack s.l.

Polígono Industrial "Z"
C/ De la Prensa, 3
08150 Parets del Vallès (Spain)

Tel. 902 153 448 - Fax 935 624 186
http: //www.reisopack.com
E-mail: reiso@reisopack.com

Customer service: ☎ (+34) 935 735 340