

AUTOMATIC SIDE-SEAL MODEL



RQ-8Y

RQ-8Y

Side-Seal Model

CE

FAST!

1.7 seconds per strap (equivalent to 35 straps per minute).

ADAPTS EASILY TO AUTOMATED PACKAGING LINES

The machine fits any existing or proposed conveyor system without modification, adapts to any conveyor height and requires no special equipment.

WIDE ADAPTABILITY TO FULLY-AUTOMATED PACKAGING LINES

End-of-cycle and strapping error signals are available as options. Larger arch sizes offer a wide range of applications, particularly for large and heavy packages.

EASY STRAP LOADING

No complicated strap threading. It only requires a touch of the outside lever.

VARIABLE TENSION

A single dial provides a wide range of tension for all packages. Tension adjustable up to 80kg (175lbs.), equivalent to 150mm (6 inch) stroke.

QUICK HEATER

In less than 25 seconds, operating temperature is reached.

EMPTY STRAP COIL DETECTION

Operation automatically stops when the strap coil is empty plus an optional warning signal is available. Easy removal of any excess strap ensures uninterrupted operation.

RE-FEED FUNCTION


Features automatic resetting of the machine for continuous operation even if a strap forwarding failure were to occur.

AUTOMATIC STRAP EJECTION

If a strap cycle is accidentally started without a package, empty strap loops are automatically ejected and all functions are reset for the next cycle.

SELF-DIAGNOSTIC MECHANISM

A programmable microprocessor constantly monitors critical functions-any irregularity detected is immediately displayed.

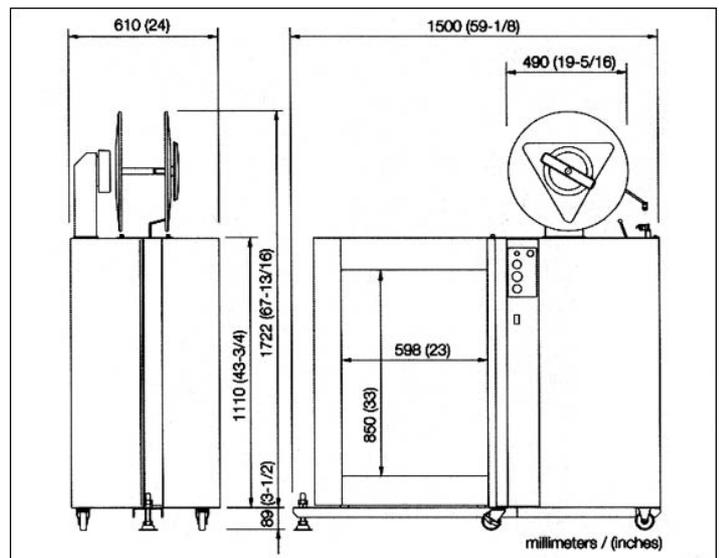

Standard Specifications

		RQ - 8Y
Dimensions	Width	1500 mm
	Height	1722 mm
	Depth	610 mm
	Weight	200 kg
Arch Size		W 600 x H 850 mm
Package Size	Max	W 570 x H 820 mm
	Min	W 30 x H 100 mm
Joint / Strap / Coil		Heat seal / polypropylene/ ID 200 x OD 450 X W 200 mm
Strap Width		5,6,9,12,15.5 mm
Strap Tension		Max. 80kg 150mm stroke
Speed		1.7 sec. / strap 35 straps per min.
Power Supply		110, 120, 200, 220, 230, 240V 1phase 50 / 60 Hz 0.65 KVA

Dimensions and specifications are subject to change without notice.



COMOSA STRAPP, S/A
 C/. Bac, nave 1 y 2 (Políg. Ind. Foinvasa)
 Telf. (93) 575 08 44
 Fax (93) 564 71 94
 08110 MONTCADA I REIXAC
 (Barcelona)